



*Congratulations on your purchase of a Pet Door by Security Boss®.*

The following is a step by step guide for installing your Security Boss® product.

## INSTALLATION INSTRUCTIONS

The package you received should contain:

- Pet Door Insert (Patio door, Sash window, or Side Slide window model)
- Pre-installed pet door
- Draft sealer (Self-adhesive weather stripping)


Be sure that you have ordered the correct size door for your pet. For long term use it is best to size the pet door so that there is ample room for your pet to navigate the opening. The top of the pet opening should be about 2 inches taller than your pet's shoulders so that they do not pinch the flaps. This will cause them to wear prematurely. On patio inserts the *RISE* is the section directly below the pet door. This should be a height that is easy for your pet to step over when using the door. For side slide window inserts, follow the instructions for a patio door.

### Patio Door Insert

**Step 1:** Loosen the thumbwheels on the front of the pet door insert by turning them counter-clockwise. The height adjuster should extend fully. Then open your sliding patio door.

**Step 2:** Place the pet door insert **top first** into the door opening. The adjustable top should engage the Top Track of the patio door. Lift the pet door insert and move the bottom of the insert onto the Wheel Track in the bottom of the sliding Patio Door Opening.

**Step 3:** Slide the insert over so that it is snug with the Vertical Jamb of the Patio Door Opening. Check that the adjusters have extended so that the top portion of the pet door insert is fully inserted into the Top Track.

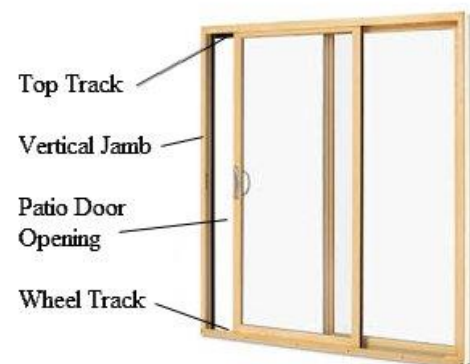

**Step 4:** Tighten the thumbwheels to secure the insert in position. Verify the correct installation by attempting to lift the insert within the sliding patio door opening. If significant movement is noticed, loosen the thumbwheels, extend the top adjustable section and then re-tighten the thumbwheels.

**Removal:**

Loosen the height adjuster thumbwheels by turning counter-clockwise and lift the insert up off the wheel track at the bottom of the door opening and swing the insert out of the door opening. Remove the top section from the top track and place the pet door insert in a secure position.

**Sash Window Insert**

**Step 1:** Open your sash window completely. Remove exterior window screen.

**Step 2:** Place pet door insert into the window opening between the open sash and window sill. Lower the Sash window onto the pet door insert.

**Step 3:** Loosen the thumbwheels on the pet door insert to extend the adjustable section. This will hold the pet door insert in position.

**Step 4:** Turn the thumbwheels clockwise to secure the adjustable section of the insert. Verify the correct installation by attempting to slide the pet door insert within the window opening. If significant movement is noticed, loosen the thumbwheels, extend the top adjustable section and then re-tighten the thumbwheels.

*If the thumbwheels contact the bottom window sill on install, you can remove one of the thumbwheels:*

- 1. Remove the two screws that hold the adjustable end piece onto the sash window pet door.*
- 2. Push the spring loaded rod down into the plastic carrier approx 1/4" below the surface with a screw driver.*
- 4. Slide thumbwheel and screw out of sash window pet door.*
- 5. Reassemble adjustable end piece and reinstall.*


**MAINTAINENCE:**

To maintain the finish of the Security Boss® patio door or window insert, occasionally apply a thin coat of good quality paste wax to the painted surface of the door. This will help protect the finish of the Security Boss® pet door.

Occasional lubrication of the adjustable section of the Security Boss® pet door with light grease is advised.

## Draft Sealer

The Draft Sealer is attached to the back of your sliding glass door (patio) or the top frame of the opening window (sash). This will over-hang the gap created when you have the sliding door or window open to accommodate the pet insert. The Draft Sealer should extend and cover this gap so that it touches the fixed panel glass...creating a seal.

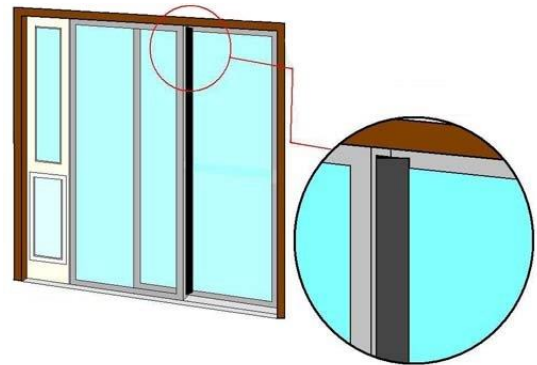

**Step 1:** Clean any dust, dirt or residue from the door or window frame where the draft seal will be attached.

**Step 2:** Measure the height of the sliding door from bottom to top or width on windows. Then Cut the draft seal with a utility knife or sharp scissors to that measurement.

**Step 3:** Remove the tape covering the adhesive on the draft seal and lightly press in the desired position, making sure the flap is touching the glass surface of the stationary door or window. Once satisfied with its location, press the draft seal firmly into place.

## DISCLAIMER:

### Child Safety:

Security Boss Manufacturing, LLC, recommends that households with small children need to exercise proper judgment with leaving their children unattended in any area with a pet door. Pet Doors come with locking panels and locking devices, using these devices minimizes any risk, but does not replace proper parental supervision.

### Installation:

We recommend that any consumer that installs their own pet door be familiar with the construction procedures and tools of installing a pet door.

### Suggestions for Locking:

We highly recommend that you use a brace bar or wood dowel to lie on the floor behind your sliding door once the patio insert is in place. This method of locking is more secure than relying on a pin lock mechanism or having your slider lock to the patio insert itself. You may also purchase an accessory patio door lock if you want to permanently attach it to your sliding doors.